AG33YL3

ALL GENERATORS
SALES•SERVICE•HIRE

Features

- Silent
- Includes Battery Isolator
- Large Fuel Tank
- Solid & Rugged Canopy
- Center Lifting Point
- Pre-Installed Outlets

www.allgenerators.com.au

Generator Specification

Genset Model	AG33YL3
Generator Output Ratng (Standby)	33kVA
Generator Output Ratng (Standby)	26.4kW
Generator Output Ratng (Prime)	30kVA
Generator Output Ratng (Prime)	24kW
Voltage	415 V
Frequency	50 Hz
Power Factor	0.8 pf(lag)
Phase	3 Phase
Rated Current (Standby)	*46Amps*
Sound Level @ 7m (75% Load)	*58 dB ±3*
Type	Silent
Generator Controller	DSE4520 MkII
Tank Capacity	175 Ltr.

1300 012 719

info@allgenerators.com.au

AG33YL3
Powered by Yanmar

ALL GENERATORS
SALES•SERVICE•HIRE

Engine Specification

Brand	Yanmar
Model	4TNV98-GGEA
Engine Power (Prime/Standby)	30.7/34.1kW
No. of Cylinders/Alignment	4 Cyl./In-line
Fuel Type	Diesel
Speed	1500 rpm
Bore/Stroke	98x110mm
Displacement	3,319 cc
Aspiration	Naturally
Starting Motor	12V - 2.3kW
Battery Type	95D31
Governor	Centrifugal

www.allgenerators.com.au

Alternator Specification

Brand	Leroy Somer
Model	LSAP 42.3C
Power Rating (kVA/kW)	30kVA/24kW
Voltage	415 V
Voltage Regulation	+-1%
Rated Current (Standby)	46Amps
Number of Poles	4
Insulation Class	Class-H
IP Rating	IP-23

Power You Can Rely On

AG33YL3
Powered by Yanmar

ALL GENERATORS
SALES•SERVICE•HIRE

Acoustic Enclosure

Acoustic Material	PU Foam
Acoustic Finish	Powder Coated
Silencer	Inside Enclosure
Sound Level @ 7m (75% Load)	*58 dB +3*
Lifting Point	Center

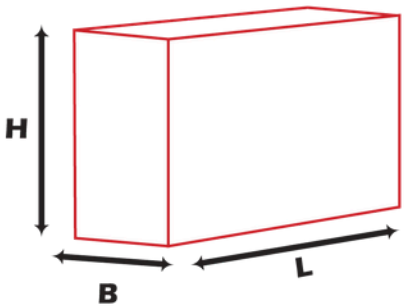

Dimensional Data

Dimensions (L x B x H) (mm)	2000x1000x1300
Dry Weight	925 kg
Fuel Tank Capacity	175 Ltr

Effiency

Fuel Consumption 50 % Load	3.65 (Ltr./Hr)
Fuel Consumption 75 % Load	5.36 (Ltr./Hr)
Fuel Consumption 100 % Load	6.94 (Ltr./Hr)

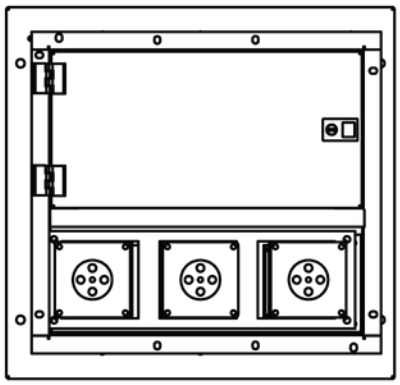

Outlets

3	x	15 Amps 240V	RCD & Weatherproof Outlets
1	x	32 Amps 415V	RCD & Weatherproof Outlets

www.allgenerators.com.au

Power You Can Rely On